


Wall-Mounted Energy Storage

TR6000WX-Pro/TR8500WX-Pro




System Topology

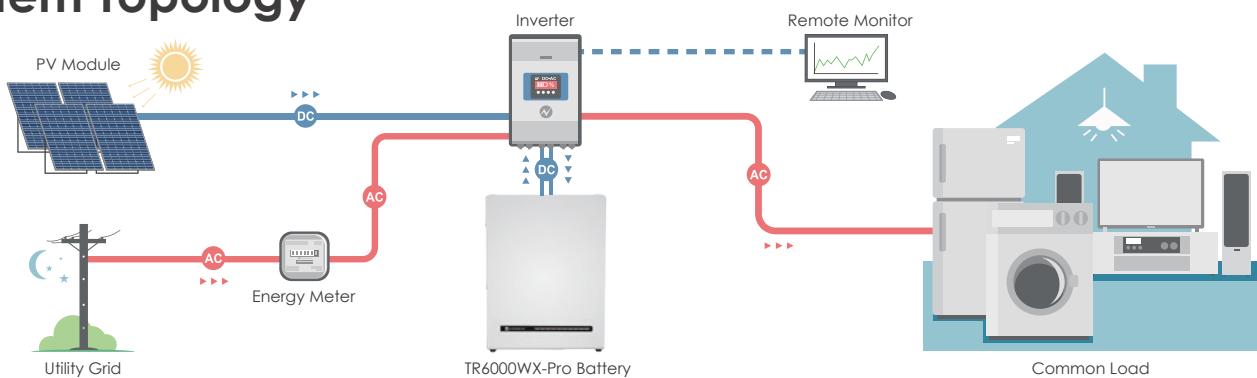

Product-Highlights

Anti-Corrosion & UV Resistance

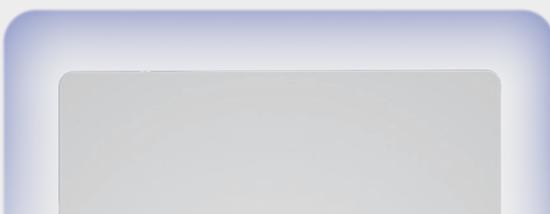

Thinner



8000 Cycles




IP66 Waterproof



BMS Multiple Security Protection,
APP Remote Information Interaction




Colorful
Breathing Light

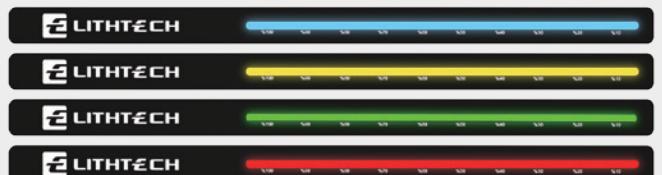

Charging Heating Technology
Can Work At -20°C




Efficient Heat Dissipation

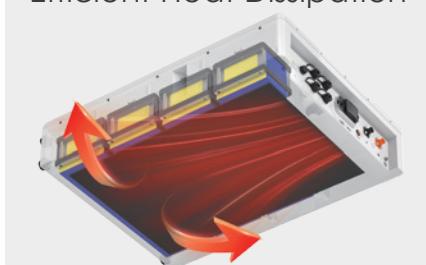

Fire Extinguishing
Equipment



Product Introduction

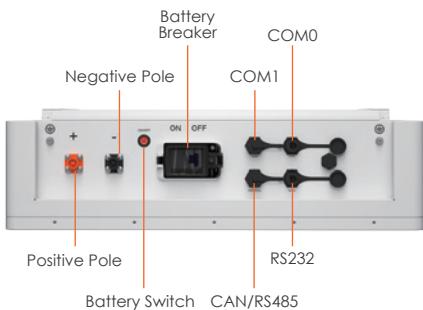

Technical Parameter



Model	TR6000WX-Pro	TR8500WX-Pro
Nominal Voltage	51.2V	51.2V
Nominal Capacity	200Ah	314Ah
Charge & Discharge Current	200A	200A
Energy	10.24kWh	16.076kWh
Chemistry	LiFePo4	
Cycle life	6000 Times	8000 Times
Rated Output Power	10kW	
Certification	CE, UN38.3, RoHS, MSDS	
Communication	RS485, RS232, CAN	
WIFI/BT	Yes	
Self-Heating	Optional	
Waterproof	IP66	
Noise Level	<10dB	
Charge Temperature	0°C to 55°C (32°F to 131°F)	
Discharge Temperature	-20°C to 60°C (-4°F to 140°F)	
Recommend Operating Temperature	15°C to 35°C (59°F to 95°F)	
Storage Temperature	0°C to 35°C (32°F to 95°F)	
Altitude	≤3000m	
Warranty	10 Years	
Dimensions(H×L×D)	83×62×17.9cm	85×65×23cm
Weight	≈99.5kg	≈135.5kg



Cleaner Energy, Simplified Life!

SHENZHEN LITTECH ENERGY CO.,LTD

Email: info@lith-tec.com

Add: 14th Floor, Block D, Central Avenue, Xixiang Street, Bao'an District, Shenzhen

©2025 by Shenzhen Littech Energy Co., Ltd. All rights reserved. Specifications and features are subject to change without prior notice. Brand names and logos are trademarks of their respective owners.

CONTACT US:

